# Benq



Screen size

# RP6503 Pro Series



65"



MeetingroomCare\* protects users' health and vision: The certified germ-resistant coating is applied on the front ports, pens, remote controls, and screens. Plus, RP03 delivers optimal colour performance thanks to its low blue light feature, which makes it the world's first interactive display approved by Eyesafe®.



With the built-in **air quality sensor** and **air ioniser**, meeting rooms can both be monitored for pollutant particles and cleansed by negative ions that are released automatically or remotely via DMS.



With the **dedicated USB port for cameras**, RP03 Series allows remote participants to see every attendee in the meeting room during video conferencing.

Panel	0010011 3120		00
	Resolution		4K UHD 3840 × 2160
	Brightness (typ.)		350 nits
	Contrast ratio (typ.)		1200:1
	Dynamic contrast ratio		30,000 : 1
	Viewing angle (H/V)		178°
	Response time (G-t-G)		8 ms
	Backlight life (hrs)		50,000
	Panel surface		AG, Haze 25%
	Operating hours		18 hours / 7 days
	Orientation		Landscape
Platform solution	System memory		8 GB
	Storage		64 GB
	OS		Android 11
	Power supply		100-240 V 50/60 Hz
Power		Maximum (W/h)	411
	Power	Typical (W/h)	80
	consumption	Standby mode (W/h)	<0.5
	AC power switch		Yes
	Wake up		LAN / HDMI / VGA / DP
	Technology		Fine IR Plus
Touch Glass	Number of touch points		40
	Interface		USB Type B x 3
	Tempered glass		3.2 mm
	Hardness		9H
	AG coating		Yes
MeetingroomCare* Technology	Smart Eye-Care solution		Flicker-free & Low blue light (TÜV & Eyesafe® certified)
	Air quality sensor		CO <sub>2</sub> - PM <sub>25</sub> - PM <sub>10</sub> , Temperature & Humidity, Air ioniser
	Germ-resistant screen		Yes (TÜV & SIAA certified)
Environment	Operation temperature		0°C ~ 40°C
	Operating humidity		20% ~ 80% RH non-condensing
	Energy efficiency		Energy Star 8.0 certified
Connectivity	Input		VGA x 1, HDMI 2.0 x 3, DP 1.2a x 1, Audio (3.5 mm) x 1
	Output		HDMI 2.0 x 1, Audio (3.5 mm) x 1
	USB		Type A x 7 (2.0 x 2 / 3.2 Gen 1 x 5), Type B x 3 (3.0), Type C x 2 (3.0)
	RS232		x1
	RJ45 (LAN)		x 2 (Android / OPS) up to 1000Mbps
	Remote controller		x1
	Built-in speaker		2 x 16 W / 1 x Subwoofer 16 W
Audio	Dolby Audio		Yes
	Array microphones		x 8
	Dimension (mm)		1489.3 × 934.3 × 121.5
	Weight (kg)	Net weight	43
Mechanical		Gross weight	56
	Bezel width (mm)		16.6 / 16.6 / 16.6 / 16.6
	Wall mounting (VESA) (screw type / max. length)		600 × 400 (4 × M8 × 25L)
	Wall mount kit		Included
	OPS slot		Yes
	NFC sensor		Yes (supports single sign-on with Azure Active Directory and Google Workspace)
	Pen tray		Yes
Warranty			3-year warranty on-site exchange
wairanty			o year warranty on site exchange

RP03 with TEY2I series is certified by Intel® Market Ready Solutions
Registered trademark as ClassroomCare®

## SOFTWARE



### EZWrite 6

Open Microsoft documents and image files directly on the display, and save sessions in editable whiteboard files (IWB) with Cloud Whiteboarding.

InstaShare 2

Allows to simultaneously share p to nine screens on the display. Want to experience enhanced wireless screen sharing, with no additional software? Try the new



X-Sign Broadcast Announcement system for instant messaging and group notification. Send visual alerts, warnings, videos to all or one specific device.




AMS Account Management System o conveniently load and access /our account and cloud storage from any BenQ display. D


### DMS


Device Management Solution entrally oversees all displays to jet real-time status information deploy OTA updates & more.

## INPUT AND OUTPUT TERMINAL

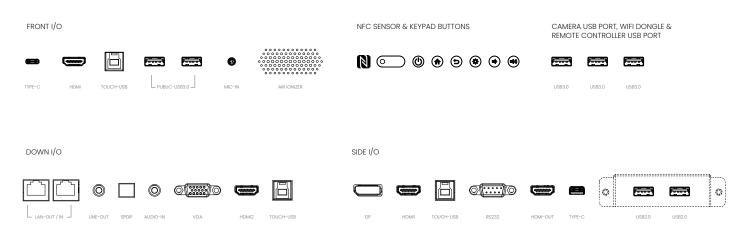

### DIMENSIONS (MM)

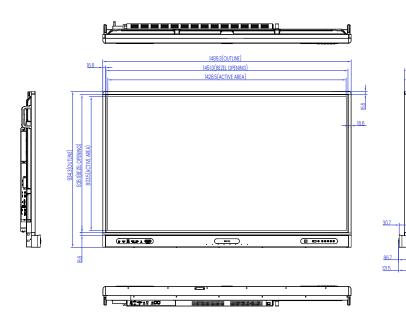





# Beng

© 2022 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual products features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

www.benq.eu/en-eu/business/index.html